



operator's manual

Serenity Soak®

INSTALLER: To be removed for use by the occupant

Always check www.americh.com for the most updated operating instructions.

CAREFULLY READ AND FOLLOW ALL INSTRUCTIONS before attempting to operate your whirlpool or Airbath® Bathtub.

IMPORTANT SAFETY INSTRUCTIONS: pertaining to a risk of fire, electric shock, or injury to persons

Warning: Whirlpool bathtubs utilize acrylic and fiberglass materials (which are inherently slippery surfaces), electricity, water, air pressure and suction. The following basic safety precautions should always be followed when using your bathtub.

READ AND SAVE THESE INSTRUCTIONS

ELECTRICAL REQUIREMENTS


Manufacturer recommends a dedicated 20 amp circuit breaker for each power cord supplied on your whirlpool bathtub. **WARNING** - When using electrical products, basic precautions should always be followed, including the following:

1. **DANGER: Risk of electric shock.** Connect only to a supply circuit protected by a Class A ground-fault circuit-interrupter (GFCI). Test on a routine basis.
2. Grounding is required. The unit should be installed by a qualified service representative and grounded.
3. (For built-in and custom units) install to permit access for servicing.
4. Supply 110 Volt electrical outlet. This circuit must be protected by a ground fault circuit interrupter (GFCI.)

5. Plug supply cord(s) into electrical outlet.
6. To test the GFCI, do the following:
 - a. Push the test button;
 - b. Check to see that power has been interrupted;
 - c. Push the reset button;
 - d. Check to see that power has been restored.

If the GFCI does not operate properly during the test, there is a ground current flowing indicating the risk of electric shock. Do not use this unit. Disconnect the unit and have the problem corrected by a qualified service representative before using.

Refer to Operating Instructions for system operations and wiring diagrams.

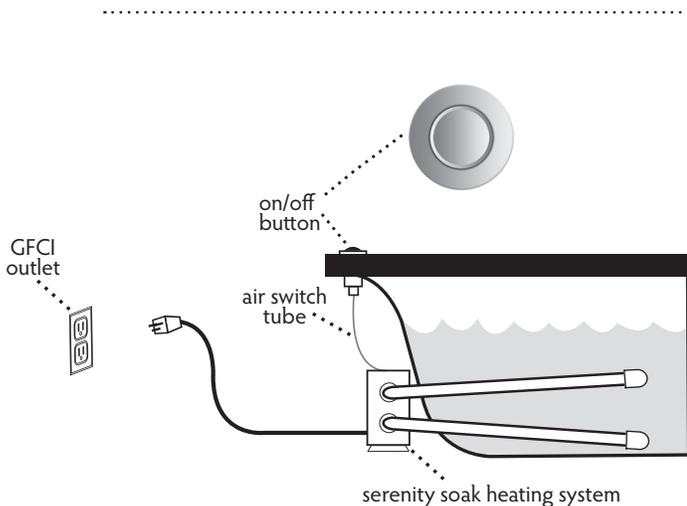

Pump On/Off

The Serenity Soak baths are equipped with an On/Off Button (fill tub until the return outlet is covered by at least 2" of water. Do not run pump without water in the tub.)

1. Press the Button to start the pump.
2. Press a second time to stop the pump.